

PALFINGER

P 200 AXE SMART **THERE IN A FLASH,** **COMPACT SET-UP** **AND FLEXIBLE HEIGHT**

LIFETIME EXCELLENCE



**MEDIA LIFTING
SOLUTIONS**





TECHNICAL SPECIFICATIONS

Max. working height	19.7 m
Max. basket bottom height	17.7 m
Max. outreach	8.40 m
Angle of main boom	-25° a + 73°
Turntable rotation	370°
Basket rotation	2 x 90°
Basket load	250 kg
Size of basket	1.4 x 0.85 x 1.1 m
Height in transport position	2.89 m
Width in transport position	2.10 m
Length in transport position	5.39 m
GVW	3500 kg

OPTIONAL

Fiberglass basket
Electric pump for internal use
Working adjustable light 60 W on the basket
Insulation 1000 V
12 V electric pump
Aluminium side panels
Customised paintwork boom

WORKING DIAGRAMS

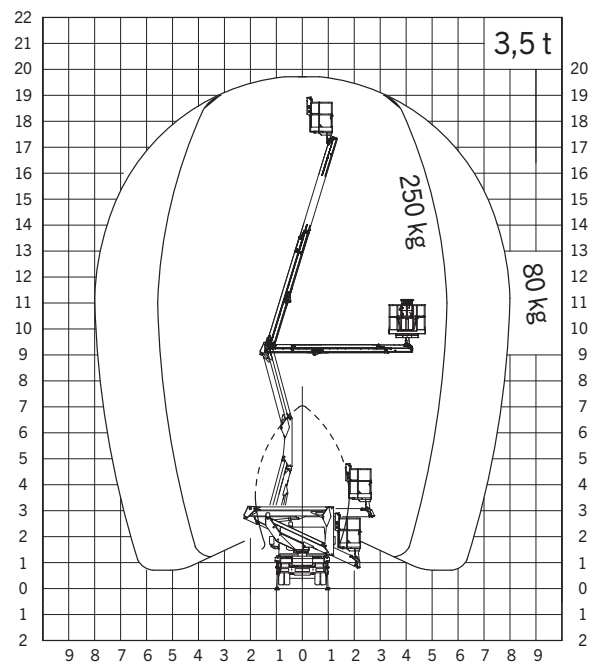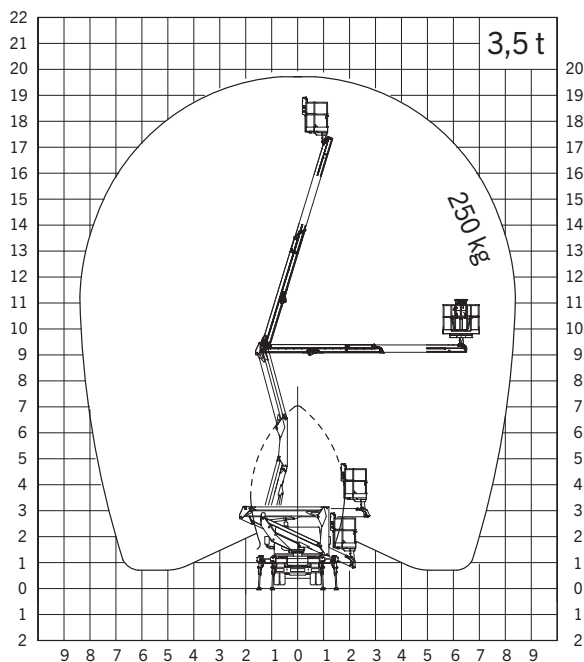

DIMENSIONS



Steve Porter
Director / Appointed Person
(Lifting Operations)

Mobile | 07534 309508
steve@medialiftingsolutions.co.uk

www.medialiftingsolutions.co.uk

Units shown in the leaflet are partially optional equipped and do not always correspond to the standard version.
Country-specific regulations must be observed.
Dimensions may vary. Subject to technical changes, errors and translation mistakes.